


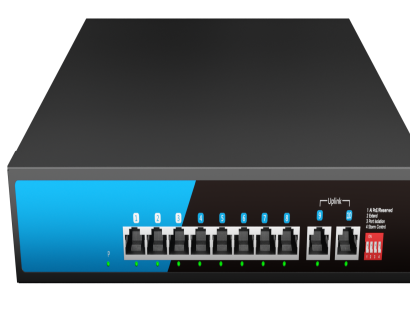



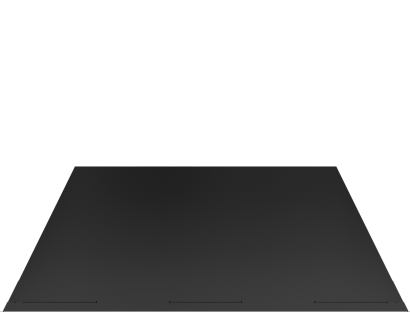

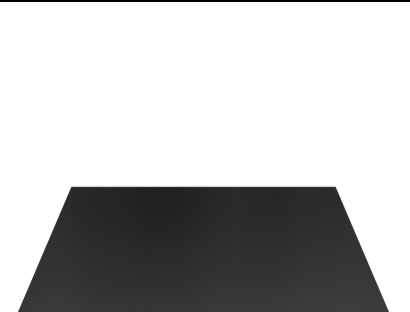
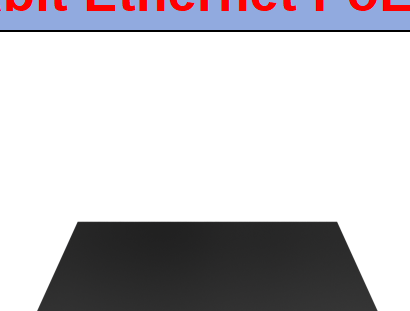
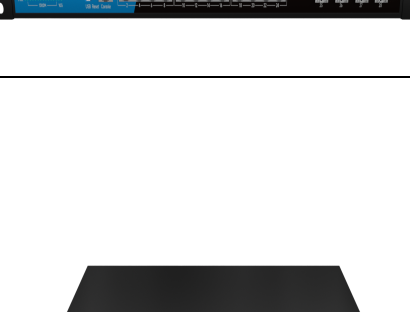


CONTENT

NO	Product Series		Product Name	Quick Guide
No	Model	Photo	Key Features	Packing Spec
Ethernet PoE Switch BACK				
1	P06TP-AC		*4x10/100Base-T, 2x10/100Base-T uplink *Port 1-4 support 802.3af/at 30W PoE, power consumption 72W *Support protocol: IEEE 802.3, IEEE 802.3u *DIP switch function: Extend, port isolation, storm control, AIPoE (Watchdog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 190*140*44mm *Package size: 220*210*52mm *Product N.W.: 0.65kg *Product G.W.: 0.92kg *Carton size: 460*285*445mm *Packing quantity: 20pcs *Packing weight: 19.4kg
Gigabit Ethernet PoE Switch BACK				
2	P06GP-AC		*4*0/100/1000Base-T, 2*10/100/1000Base-T uplink *Port 1-4 support 802.3af/at 30W PoE, power consumption 72W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 204*140*44mm *Package size: 320*204*67mm *Product N.W.: 0.7kg *Product G.W.: 1kg *Carton size: 355*340*425mm *Packing quantity: 10pcs *Packing weight: 11kg
3	P08GP-AC		*8x10/100/1000Base-T *Port 1-8 support 802.3af/at 30W PoE, power consumption 135W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 220*161*44mm *Package size: 370*229*67mm *Product N.W.: 0.9kg *Product G.W.: 1.1kg *Carton size: 355*340*425mm *Packing quantity: 10pcs *Packing weight: 11kg
4	P010GP-S2-AC-1		*8x10/100/1000Base-T, 2x1000Base-X uplink *Port 1-8 support 802.3af/at 30W PoE, power consumption 135W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 270*181*44mm *Package size: 370*229*67mm *Product N.W.: 1.1kg *Product G.W.: 1.5kg *Carton size: 390*355*475mm *Packing quantity: 10pcs *Packing weight: 16kg
5	P010GP-AC-1		*8x10/100/1000Base-T, 2x10/100/1000Base-T uplink *Port 1-8 support 802.3af/at 30W PoE, power consumption 135W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 270*181*44mm *Package size: 370*229*67mm *Product N.W.: 1.1kg *Product G.W.: 1.5kg *Carton size: 390*355*475mm *Packing quantity: 10 pcs *Packing weight: 16kg
6	P018GP-S2-ACR		*16x10/100/1000Base-T, 2x1000Base-X uplink *Port 1-16 support 802.3af/at 30W PoE, power consumption 300W(400W optional) *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 440*280*44mm *Package size: 525*390*95mm *Product N.W.: 3.9kg *Product G.W.: 4.35kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 18.4kg
7	P026GP-S2-ACR		*24x10/100/1000Base-T, 2x1000Base-X uplink *Port 1-24 support 802.3af/at 30W PoE, power consumption 300W(400W optional) *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 440*280*44mm *Package size: 525*390*95mm *Product N.W.: 3.9kg *Product G.W.: 4.5kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 19kg
8	P028GP-B2S2-ACR		*24x10/100/1000Base-T, 2x10/100/1000 Base-T uplink, 2x1000 Base-X uplink *Port 1-2 support 802.3af/at/bt 60W, port 3-24 support 802.3af/at 30W PoE, power consumption 300W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3ab *DIP switch function: Extend, port isolation, storm control, AIPoE (WatchDog) *Working temperature: -10°C~+50°C *Surge protection: 6KV *Built-in power: AC100-240V 50/60Hz *Support desktop/wall mounted	*Product size: 440*280*44mm *Package size: 525*390*95mm *Product N.W.: 3.5kg *Product G.W.: 4.35kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 18.4kg
L2+ Management Gigabit Ethernet PoE Switch BACK				
9	P010GPM-S2-AC		*8x10/100/1000Base-T, 2x1000Base-X(SFP) uplink, 1xConsole port *Port 1-8 support 802.3af/at 30W PoE, power consumption 135W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3z, IEEE 802.3ab *Support protocol: Web management, CLI, SNMP v1/v2/v3, RMON, STNP, Spanning tree, ERPS ring network, storm control, port Isolation, IGMP Snooping, VLAN, GVRP, Protocol VLAN, Voice VLAN, MAC VLAN, ACL, QoS, port mirroring, support IPV4/IPV6 address management, device scan, static IPV4/IPv6 route, DHCP server, Loopback Interface	*Product size: 220*161*44mm *Package size: 320*204*67mm *Product N.W.: 0.97kg *Product G.W.: 1.18kg *Carton size: 355*340*425mm *Packing quantity: 10pcs *Packing weight: 14kg
10	P028GCPM-C4-ACR		*24x10/100/1000Base-T, 4x1000M Combo, 1xConsole port *Port 1-24 support 802.3af/at 30W PoE, power consumption 400W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3z, IEEE 802.3ab *Function: Web management, CLI, SNMP v1/v2/v3, RMON, STNP, Spanning tree, ERPS ring network, storm control, port Isolation, IGMP Snooping, VLAN, GVRP, Protocol VLAN, Voice VLAN, MAC VLAN, ACL, QoS, port mirroring, support IPV4/IPV6 address management, device scan, static IPV4/IPv6 route, DHCP server, Loopback Interface	*Product size: 440*280*44mm *Package size: 525*390*95mm *Product N.W.: 3.4kg *Product G.W.: 4.3kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 16.6kg
L3 Management Gigabit Ethernet PoE Switch BACK				
11	P028XGPM-X4-ACR		*24x10/100/1000Base-T, 4x10G Base-X(SFP), 1xConsole port *Port 1-24 support 802.3af/at 30W PoE, power consumption 400W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3ae *Function: Web management, CLI, SNMP v1/v2/v3, RMON, STNP, Spanning tree, ERPS ring network, storm control, port Isolation, VLAN, IGMP Snooping, ACL, QoS, port mirroring, support IPV4/IPV6 address management, device scan, static IPV4/IPv6 route, OSPF, RIP, VRRP, DHCP Server, Loopback Interface	*Product size: 440*280*44mm *Package size: 525*390*95mm *Product N.W.: 3kg *Product G.W.: 4.4kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 18.3kg
12	P054XGPM-X6-ACR		*48x10/100/1000Base-T, 6*10GBase-X, 1xConsole port *Port 1-48 support 802.3af/at 30W PoE, power consumption 400W *Support protocol: IEEE 802.3, IEEE 802.3u, IEEE 802.3z, IEEE 802.3z, IEEE 802.3ab, IEEE 802.3ae *Function: WEB management, CLI, SNMP v1/v2/v3, RMON, STNP, Spanning tree, ERPS ring network, storm control, port Isolation, VLAN, IGMP Snooping, ACL, QoS, port mirroring, support IPV4/IPV6 address management, device scan, static IPV4/IPv6 route, OSPF, RIP, VRRP, DHCP Server, Loopback Interface	*Product size: 440*270*44mm *Package size: 525*390*95mm *Product N.W.: 4kg *Product G.W.: 4.5kg *Carton size: 540*400*410mm *Packing quantity: 4pcs *Packing weight: 19kg