

1.6T OSFP1600 to OSFP1600 Direct Attached Cable



Features

- OSFP TYPE2 Module compliant to OSFP MSA
- Transmission data rate up to PAM4 212.5Gbps per channel
- Enable 1600Gb/s Transmission
- Link length up to 1.5m
- Built-in EEPROM functions
- Operating case temperature 0°C to +70°C
- RoHS2.0 compliant

Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Supply Voltage	Vcc	3.13	3.3	3.47	V
Storage temperature	Ts	-40		85	°C
Operating Case temperature	Tc	0		70	°C
Humidity	Rh	5		85	%
Data Rate			1600		Gbps


Physical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Length	L	0.5		1.5	M
AWG		28		26	AWG
Jacket material		HAIRTAIL Net			

Electrical Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Raw cable impedance	Zca	90	95	100	ohm
Mated connector Impedance	Zmated	85		105	ohm
Maximum insertion loss at 53.125 GHz	IL _{CA-B}			24	dB
	IL _{CA-C}			29	dB
	IL _{CA-D}			34	dB
Minimum cable assembly ERL	ERL	TBD			dB

Pin Description

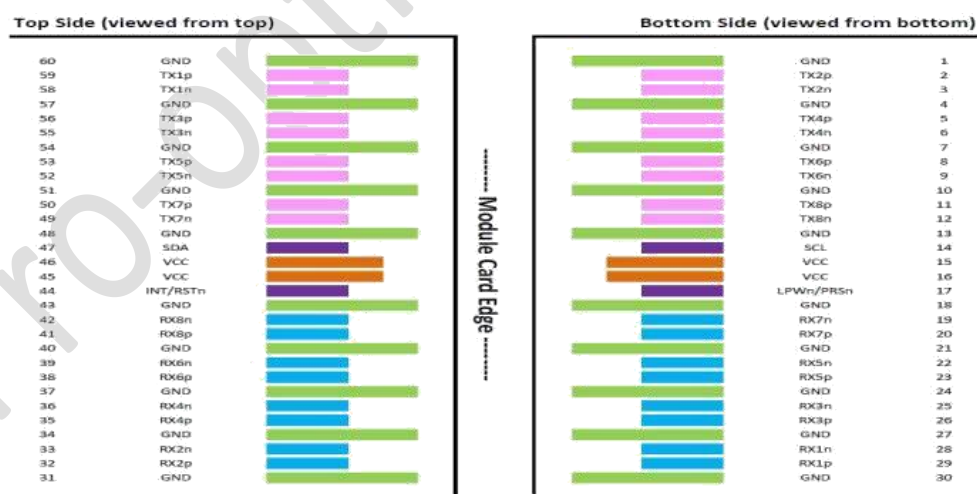


Electrical Pin-out Details for OSFP

Pin#	Symbol	Description	Logic	Direction	Plug Sequence	Notes
1	GND	Ground			1	
2	TX2p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
3	TX2n	Transmitter Data Inverted	CML-I	Input from Host	3	
4	GND	Ground			1	
5	TX4p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
6	TX4n	Transmitter Data Inverted	CML-I	Input from Host	3	
7	GND	Ground			1	
8	TX6p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
9	TX6n	Transmitter Data Inverted	CML-I	Input from Host	3	
10	GND	Ground			1	
11	TX8p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
12	TX8n	Transmitter Data Inverted	CML-I	Input from Host	3	
13	GND	Ground			1	
14	SCL	2-wire Serial interface clock	LVC MOS-I/O	Bi-directional	3	Open-Drain with pull-up resistor on Host
15	VCC	+3.3V Power		Power from Host	2	
16	VCC	+3.3V Power		Power from Host	2	
17	LPWn/PRSn	Low-Power Mode / Module Present	Multi-Level	Bi-directional	3	See pin description for required circuit
18	GND	Ground			1	
19	RX7n	Receiver Data Inverted	CML-O	Output to Host	3	
20	RX7p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
21	GND	Ground			1	
22	RX5n	Receiver Data Inverted	CML-O	Output to Host	3	
23	RX5p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
24	GND	Ground			1	
25	RX3n	Receiver Data Inverted	CML-O	Output to Host	3	
26	RX3p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
27	GND	Ground			1	
28	RX1n	Receiver Data Inverted	CML-O	Output to Host	3	
29	RX1p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
30	GND	Ground			1	

Pin#	Symbol	Description	Logic	Direction	Plug Sequence	Notes
31	GND	Ground			1	
32	RX2p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
33	RX2n	Receiver Data Inverted	CML-O	Output to Host	3	
34	GND	Ground			1	
35	RX4p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
36	RX4n	Receiver Data Inverted	CML-O	Output to Host	3	
37	GND	Ground			1	
38	RX6p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
39	RX6n	Receiver Data Inverted	CML-O	Output to Host	3	
40	GND	Ground			1	
41	RX8p	Receiver Data Non-Inverted	CML-O	Output to Host	3	
42	RX8n	Receiver Data Inverted	CML-O	Output to Host	3	
43	GND	Ground			1	
44	INT/RSTn	Module Interrupt / Module Reset	Multi-Level	Bi-directional	3	See pin description for required circuit
45	VCC	+3.3V Power		Power from Host	2	
46	VCC	+3.3V Power		Power from Host	2	
47	SDA	2-wire Serial interface data	LVC MOS-I/O	Bi-directional	3	Open-Drain with pull-up resistor on Host
48	GND	Ground			1	
49	TX7n	Transmitter Data Inverted	CML-I	Input from Host	3	
50	TX7p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
51	GND	Ground			1	
52	TX5n	Transmitter Data Inverted	CML-I	Input from Host	3	
53	TX5p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
54	GND	Ground			1	
55	TX3n	Transmitter Data Inverted	CML-I	Input from Host	3	
56	TX3p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
57	GND	Ground			1	
58	TX1n	Transmitter Data Inverted	CML-I	Input from Host	3	
59	TX1p	Transmitter Data Non-Inverted	CML-I	Input from Host	3	
60	GND	Ground			1	

Mechanical Dimensions

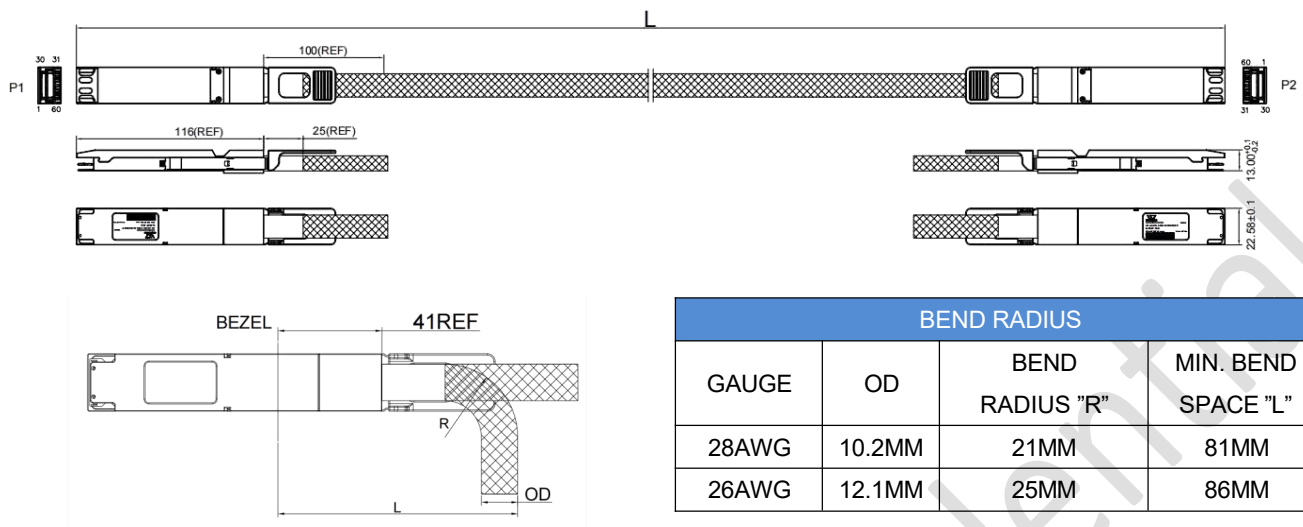

Ordering Information

Part Number	Description
POOP16DP5	1.6T OSFP1600 to OSFP1600 DAC, 28/26AWG, 0.5m
POOP16D01	1.6T OSFP1600 to OSFP1600 DAC, 28/26AWG, 1.0m
POOP16D1P5	1.6T OSFP1600 to OSFP1600 DAC, 28/26AWG, 1.5m

References

1. OSFP MSA Rev5.0
2. IEEE802.3dj
3. Common Management Interface Specification(CMIS) Rev5.0

Revision Records

REV.	Description	Designed	Checked	Approved	Issue Date
X1	Preliminary	XICHUN TAN	XICHUN TAN	RANY LEI	2023.11.24